



### Series TF-1—Tideflex® Check Valve

#### Features & Benefits

- Ideal for manhole installations
- Lightweight, all-elastomer design
- Seals around entrapped solids
- Cost-effective, maintenance-free design

#### Materials of Construction

- Elastomers available in Pure Gum Rubber, Neoprene, Hypalon®, Chlorobutyl, Buna-N, EPDM, and Viton®

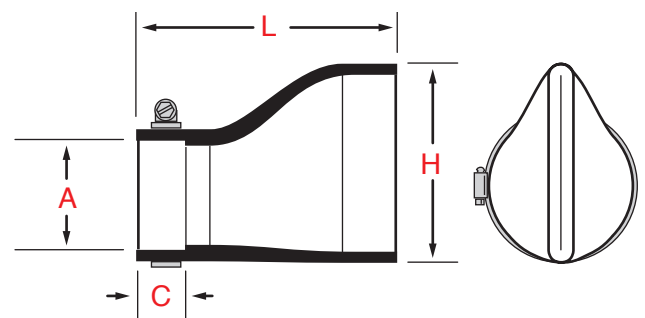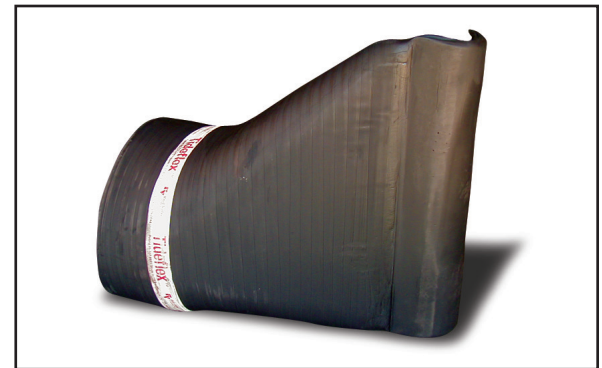

We are pleased to announce the introduction of the revolutionary TF-1 Check Valve. It functions and operates under the same simple principle of operation as the original TF-2 Tideflex®.

This design is ideal for existing manhole installations where the invert of the pipe is close to the floor of the vault. There are many check valves in interceptors, manholes, and vaults. These vaults are designed so that there would be a maximum gravity head; thus, the invert pipe is as close to the base as possible. The TF-1 allows installations in such applications.

The Tideflex® Technologies Series TF-1 Tideflex® Check Valve is designed for applications in manholes, where the bottom of the manhole is close to the invert of the pipe. The TF-1 configuration allows the valve to be properly installed without manhole modification, ensuring positive backflow prevention and a lifetime of maintenance-free performance.

Pipe O.D. (A)	Length (L)	Bill Height (H)	Cuff Length (C)
4	10	8	1 1/2
5	10	8	1 1/2
6	16	12	2
8	18	16	2
10	23	19	3
12	27	23	4
14	27	23	4
16	35	30	5
18	36	34	6
20	44	37	8
22	44	37	8
24	48	43	8
26	48	43	8
28	48	43	8
30	56	55	9
32	56	55	9
36	67	69	10
38	67	69	10
40	67	69	10
42	61	71	10
44	61	71	10
48	66	78	10
50	66	78	10
54	66	78	10
58	66	78	10
60	73	91	14
68	73	91	14
72	96	115	16

Numbers indicate maximum dimensions in inches.